


Process Control Unit Documentation

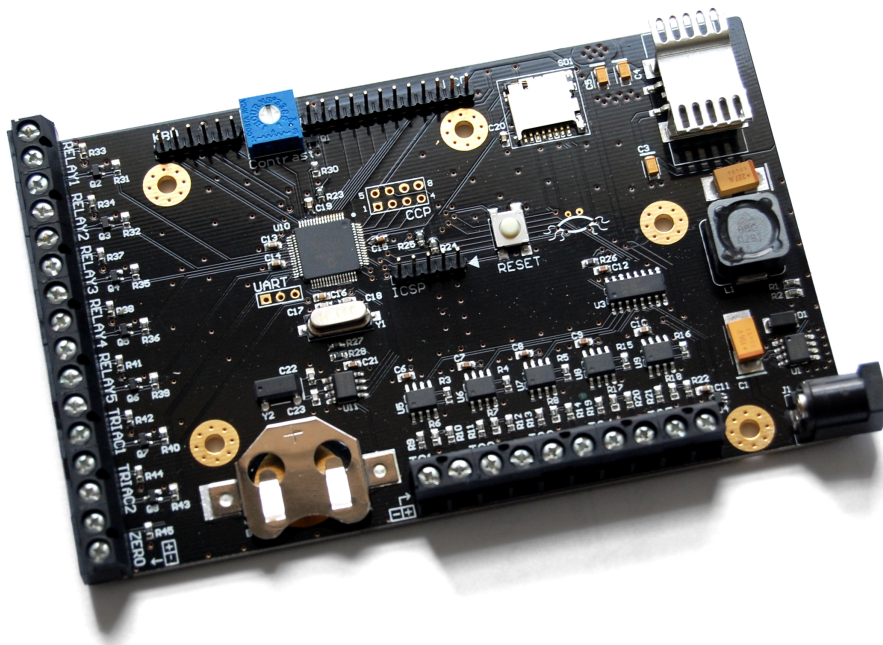

**Small-Scale Biofuel Production
2010/2011**

Contents

Introduction	3
Hardware Overview	3
Power Supply	3
Microcontroller	4
Temperature measurement	5
Electrical Interface	6
User Interface	7
Real Time Clock	8
MicroSD Card	9
Board Layout and Schematics	10

Introduction

This Process Control Unit board was designed to provide an integrated solution for controlling a small-scale biofuel production plant. The unit interfaces with an electro-mechanical installation consisting of motors, heaters, solenoid valves, relays and other components. User interface consists of an LCD and four push buttons.

This document provides the information required to use and develop the control system.

Hardware Overview

The main features of the board are:

- PIC18F66K22 8-bit microcontroller
 - 64KB Flash Program Memory
 - 4KB SRAM
 - 1KB Data EEPROM
- 16MHz crystal oscillator
- Switch-mode voltage regulator with input range of 4V to 34V and an adjustable output set to 5V
- Low Drop-Out linear regulator providing 3.3V output
- Five thermocouple channels
- Seven open-drain outputs and one input designed to interface to external opto-isolators
- HD44780-compatible LCD interface
- Push button interface consisting of 4 I/O pins and 2 power pins
- MicroSD card slot (SPI mode)
- Real-Time Clock with a dedicated 32.768kHz crystal
- In Circuit Serial Programming (ICSP) header

Power Supply

The on-board power supply, in Figure 1, was designed to accept a wide range of input voltages. The switching regulator is capable of working with up to 34V input. The output is set to 5V and is used to power the LDO regulator and the LCD.

The circuit takes power from a wall plug PSU rated for up to 1A at 12V. A standard DC jack with pin diameter of 2.1mm is used for power connection.

All components except the LCD are powered from a 3.3V supply. This is provided by a Low Drop-Out regulator.

For more information, refer to *Schematic Sheet 2*.

Note: The LDO used is in TO-252 package and the tab is connected to output. The heatsink is soldered to the same plane as the tab and, therefore, has 3.3V on it.

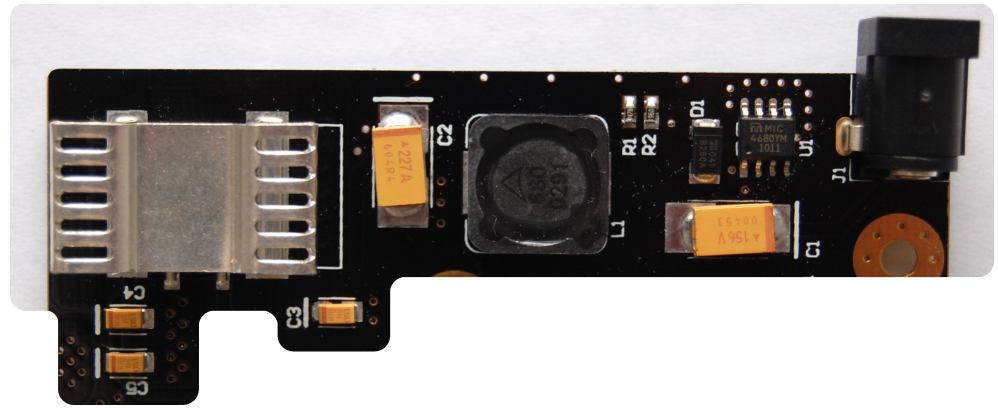


Figure 1: Power supply circuitry

Microcontroller

The control logic is implemented on a PIC18F66K22 microcontroller (revision A3). The PIC and relevant components are shown in Figure 2.

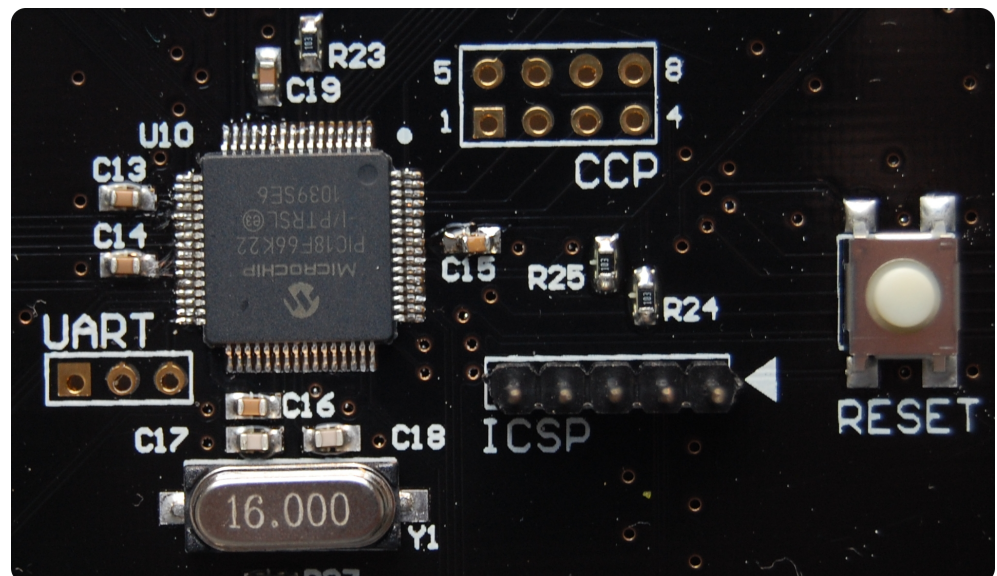


Figure 2: Microcontroller circuitry

ICSP Header

The most relevant part of the circuitry, for the purpose of development, is the ICSP programming and debugging header. This is a standard 5-pin interface for programming PIC controllers.

Figure 3: ICSP pin layout

5	4	3	2	1	◀	1. MCLR
ICSP						2. 3.3V
						3. GND
						4. PGD
						5. PGC

Note: PIC programmers have 6-pin headers. Pin 6 is reserved for Low Voltage programming (LVP).

Expansion Headers

There are two unpopulated headers that can be used to further extend the functionality of the board.

The UART (Universal Asynchronous Receiver/Transmitter) port can be used to add a serial communication for debugging or data logging.

Figure 4: UART pin layout

UART

1	2	3	
			1. GND
			2. TX1
			3. RX1

The second header breaks out the CCP (Capture/Compare/PWM) pins. These have many possible uses. PWM output, for example, could be used to implement a piezoelectric buzzer driver for audio feedback.

Figure 5: CCP pin layout

5	5	6	7	8	8	
1	1	2	3	4	4	1. CCP9
						2. CCP8
						3. CCP7
						4. CCP6
						5. 3.3V
						6. 3.3V
						7. GND
						8. GND

The above headers can also be used as a general I/O expansion.

Temperature measurement

The temperature measurement circuitry consists of five thermocouple channels and an on-board reference temperature sensor.


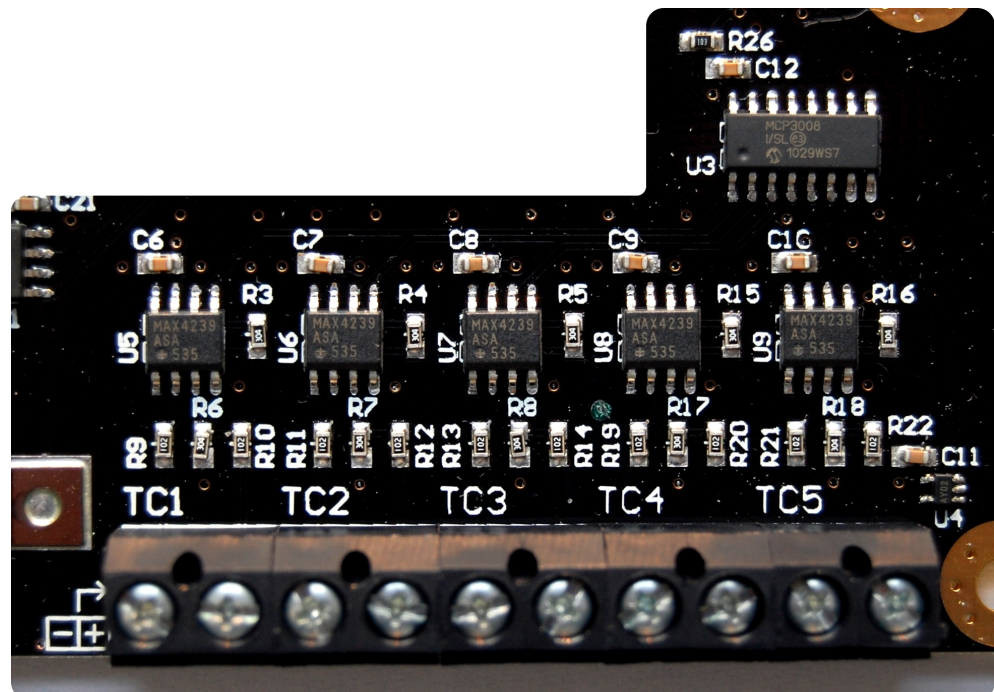


Figure 6: Temperature measurement circuitry

The thermocouples are connected to the terminal blocks (at the bottom of Figure 6). The polarity is indicated by a special marking (shown in Figure 7) and is the same for all five pairs.

Figure 7: Thermocouple input polarity indicator



Signals from the thermocouples go the differential amplifier configured for a gain on 300. The amplified signals are then sampled by the Analogue to Digital Converter (ADC).

The on-board temperature sensor is a linear active thermistor. The device outputs 400mV at 0°C and has a temperature coefficient of 19.5mV/°C.

For further information, refer to *Schematic Sheet 4*.

Note: Due to noise problems, each negative input has been connected to ground. This is not reflected in the schematic diagram.

Electrical Interface



Figure 8: Electrical interface circuitry

Due to high voltages present on the electrical system, signals that go between the electrical and control parts need to be isolated. The isolation is achieved by using opto-couplers.


While the opto-couplers are located on the electrical side, the interface is on the control PCB. Eight terminal block pairs are used for connecting the two parts.

Pairs labelled as RELAY_x and TRIAC_x are open-drain outputs and they are used to turn on the LED inside the opto-isolator. Pair labelled as ZERO is an input that is driven by the open-collector output of the opto-isolator while the opto-isolator itself is driven by a Zero Crossing Detector (ZCD).

Input ZERO is pulled to 3.3V line through a 10k resistor and goes to INT1 (Interrupt 1) pin on the PIC.

The polarity of the connectors is indicated by a marking near the ZCD input and is the same for all pairs.

Figure 9: Electrical interface polarity indicator



Further connection details can be found in *Schematic Sheet 5*.

User Interface

The user interface of the control system consists of an LCD and a key pad. The design supports all HD44780-compatible displays and currently uses a 4x20 character LCD. The key pad is made of four push buttons.



Figure 10: User interface circuitry

Display

The LCD header pin layout and descriptions are shown in Figure 11. The cathode of the backlight LED is connected to the drain of the MOSFET Q1. This enables the backlight to be controlled by software.

Figure 11: LCD header pin layout

											LCD
16	15	14	13	12	11	6	5	4	3	2	1
Pin #	Signal		Description								
1	GND		Ground								
2	5V		Supply voltage								
3	V0		Contrast								
4	RS		Register Select								
5	RW		Read/Write								
6	E		Enable								
11	DB4		Data Bit 4								
12	DB5		Data Bit 5								
13	DB6		Data Bit 6								
14	DB7		Data Bit 7								
15	LED +		Anode of the Backlight LED								
16	LED -		Cathode of the Backlight LED								

As mentioned before, the LCD requires a 5V supply to operate, but the control and data pins can be driven directly by PIC, because a 3.3V signal is recognised, by the LCD, as a valid logic high.

Note: The board is designed for 4-bit LCD interface and, therefore, data bits 0 through 3 are not used.

Keypad

The keypad interface is very basic: it has two power pins and four I/O pins. The keypad was designed for this project and consists of four push buttons in an active-low configuration. The pin layout is shown in .

Figure 12: Keypad header pin layout

KBD

6	5	4	3	2	1
---	---	---	---	---	---

1. OK
2. ESC
3. 3.3V
4. GND
5. UP
6. DOWN

Real Time Clock

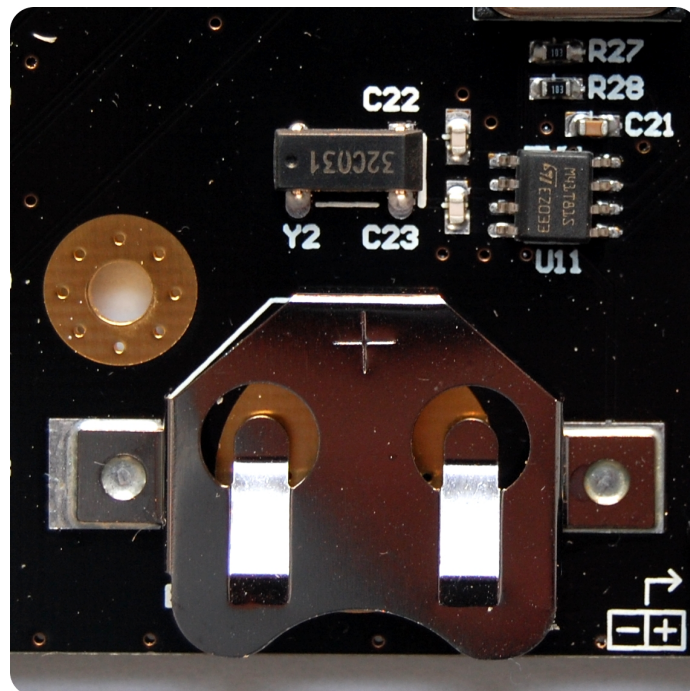


Figure 13: Real Time Clock circuitry

The board also hosts a real time clock chip together with a 32.768kHz oscillator and a backup battery retainer.

The RTC communicates with PIC via an I2C bus. The battery retainer accepts CR2032 coin cells.

MicroSD Card


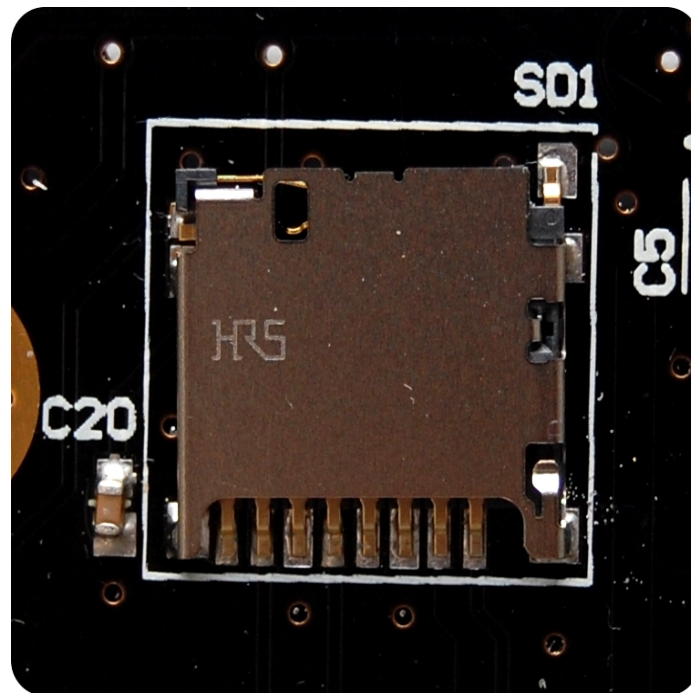



Figure 14: MicroSD card slot

For data logging capabilities, the design includes a microSD card slot. The PIC and the card can communicate using an SPI bus and SPI mode protocol. The “card in” signal can be used to detect when the card is present.


Board Layout and Schematics

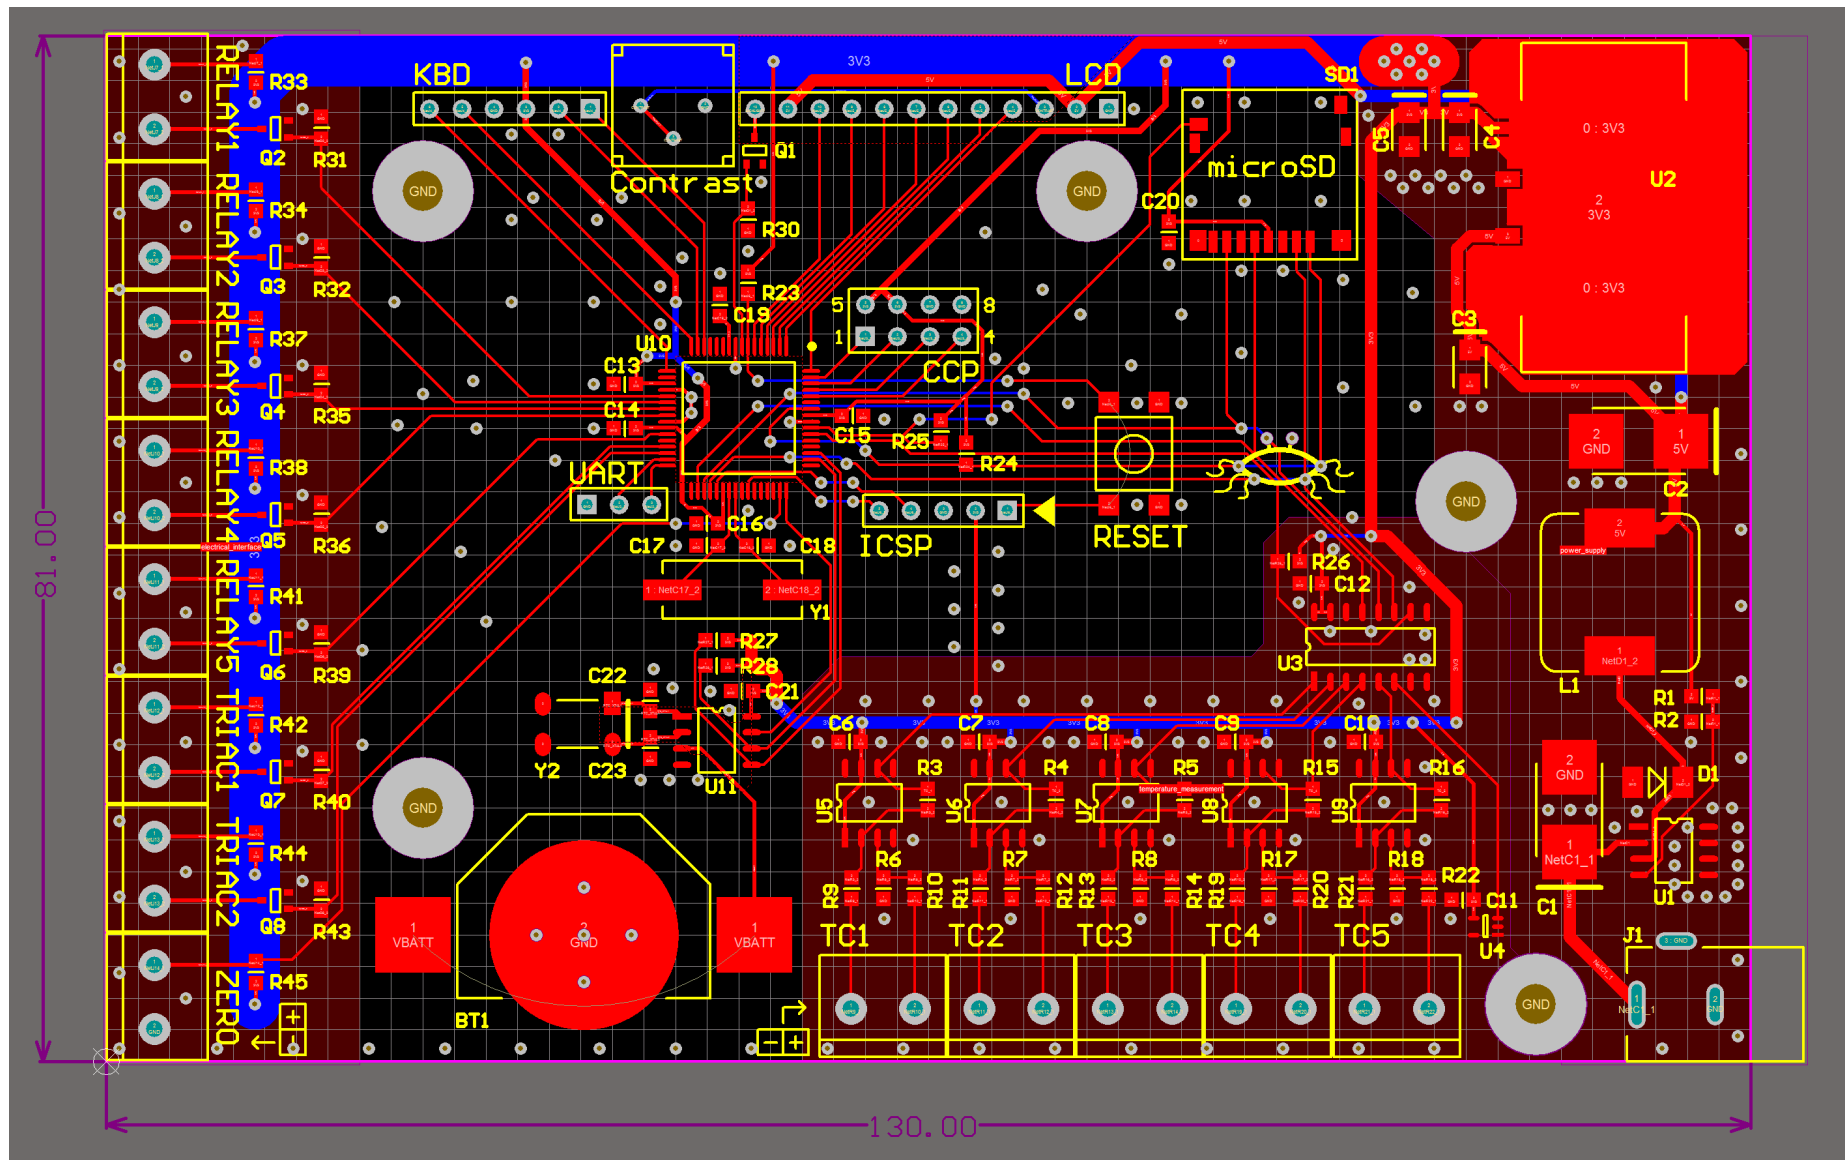








1	2	3	4																					
A				A																				
B	PSU power_supply.SchDoc	Microcontroller mcu.SchDoc	Temperature measurement temperature_measurement.SchDoc	B																				
C	Electrical interface electrical_interface.SchDoc	Miscellaneous devices misc.SchDoc		C																				
D				D																				
<table><tr><td colspan="2">TITLE</td><td colspan="2">Control System</td></tr><tr><td colspan="2">DESCRIPTION</td><td colspan="2">Document Map</td></tr><tr><td>SHEET</td><td>1 of 6</td><td>ENGINEER</td><td>AJ</td></tr><tr><td>REVISION</td><td>001</td><td>AUTHOR</td><td>AJ</td></tr></table> <table><tr><td>DATE</td><td>03/04/2011</td></tr><tr><td>FILE</td><td>control_system.SchDoc</td></tr></table> 				TITLE		Control System		DESCRIPTION		Document Map		SHEET	1 of 6	ENGINEER	AJ	REVISION	001	AUTHOR	AJ	DATE	03/04/2011	FILE	control_system.SchDoc	
TITLE		Control System																						
DESCRIPTION		Document Map																						
SHEET	1 of 6	ENGINEER	AJ																					
REVISION	001	AUTHOR	AJ																					
DATE	03/04/2011																							
FILE	control_system.SchDoc																							
1	2	3	4																					

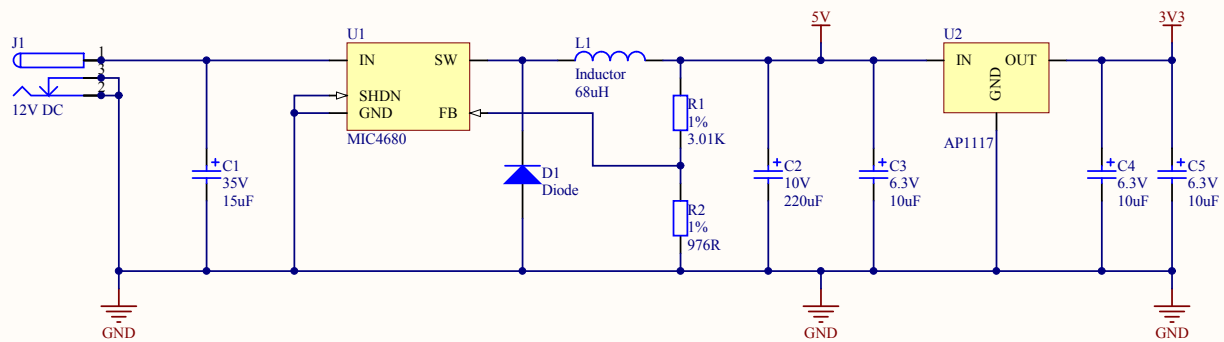

TITLE Power Supply			
DESCRIPTION Switching power supply and a low dropout regulator. Input: 12V DC, 1A.			
SHEET 2 of 6	ENGINEER AJ	DATE 03/04/2011	
REVISION 003	AUTHOR AJ	FILE power_supply.SchDoc	








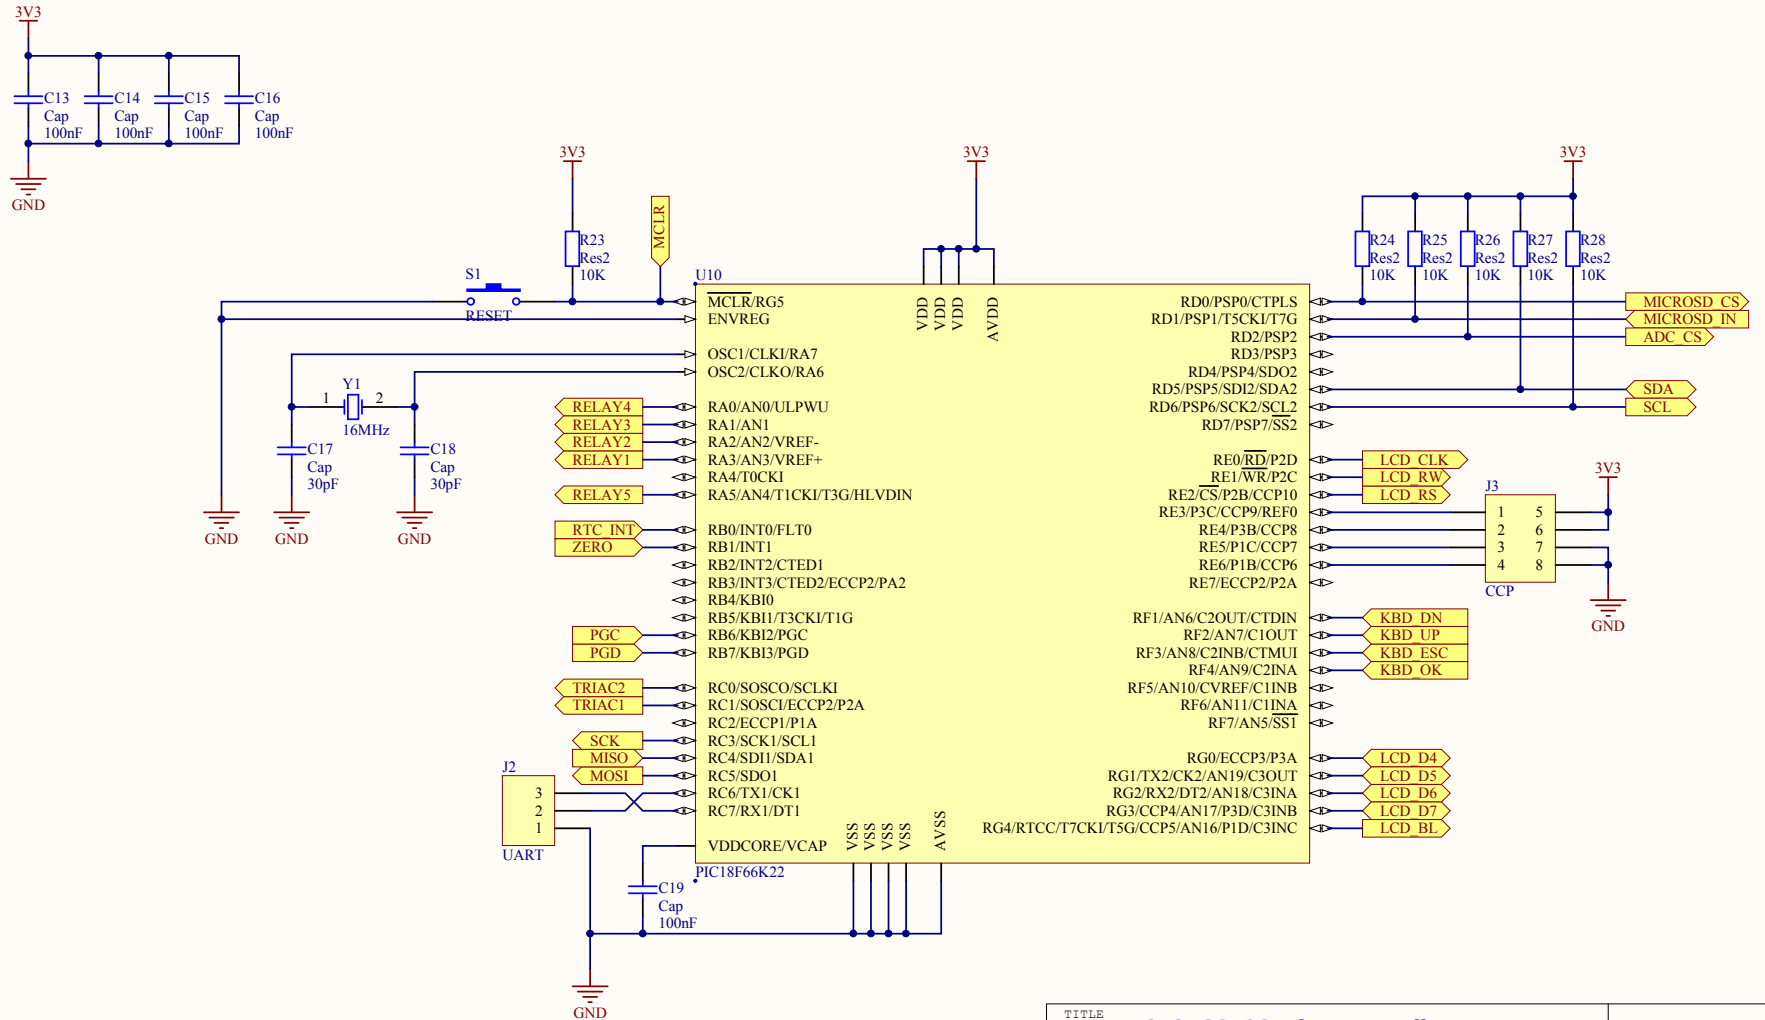


TITLE PIC18F66K22 Microcontroller			
DESCRIPTION *			
SHEET 3 of 6	ENGINEER AJ	DATE 03/04/2011	
REVISION 003	AUTHOR AJ	FILE mcu SchDoc	

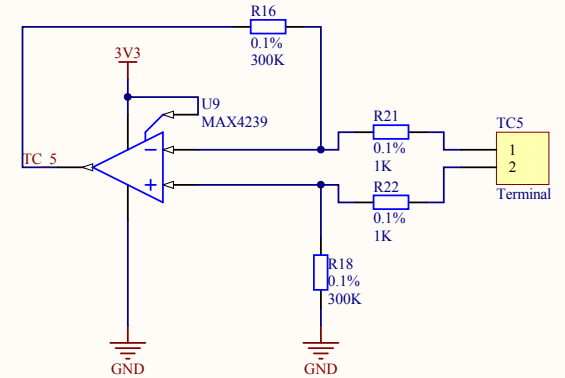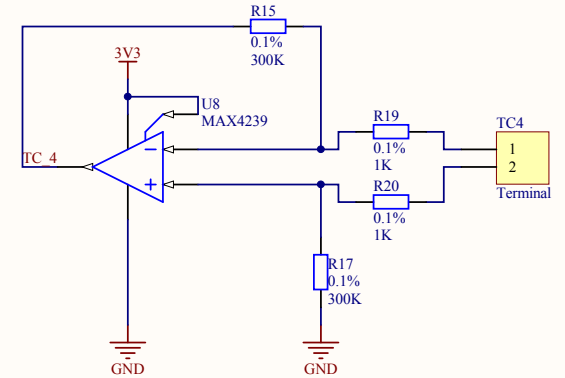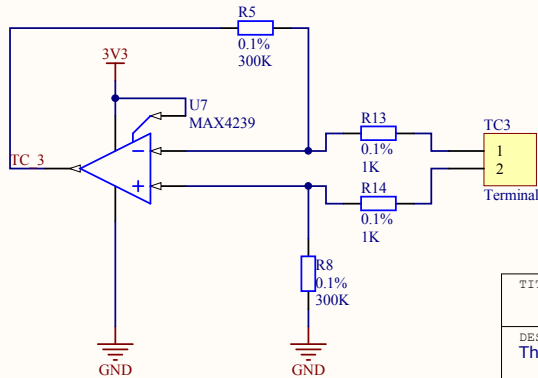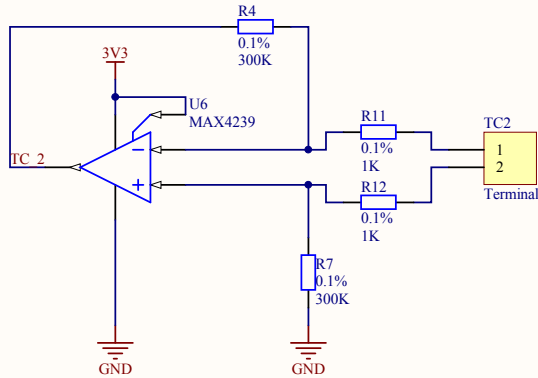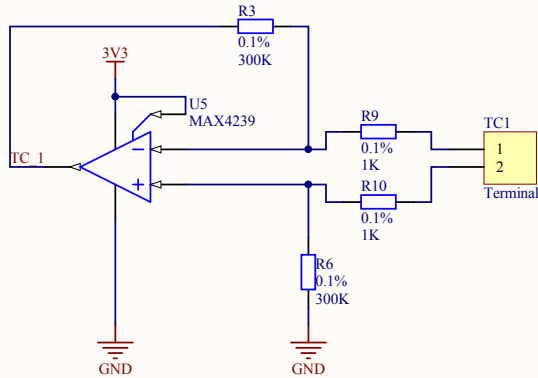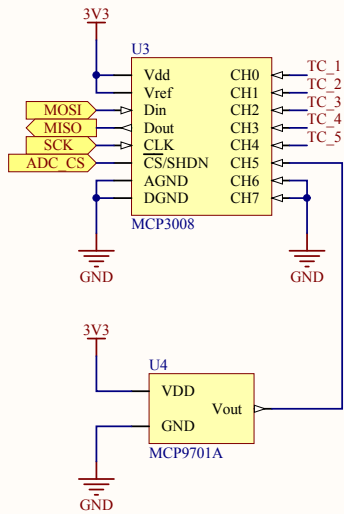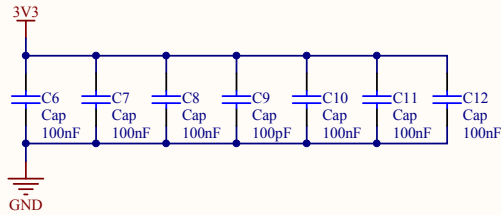


TITLE			Temperature Measurement		
DESCRIPTION			Thermocouple interfaces, on-board temperature sensor and ADC.		
SHEET	4 of 6	ENGINEER	AJ	DATE	03/04/2011
REVISION	005	AUTHOR	AJ	FILE	temperature_measurement.SchDoc



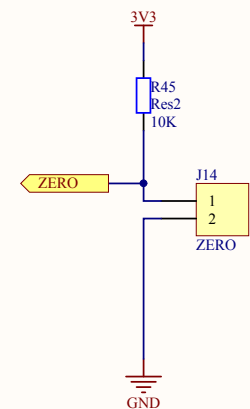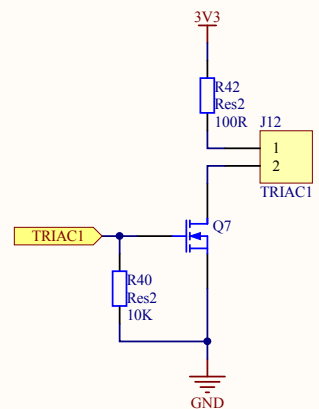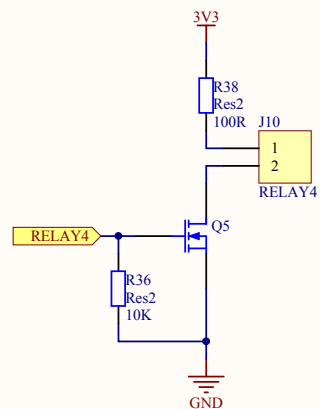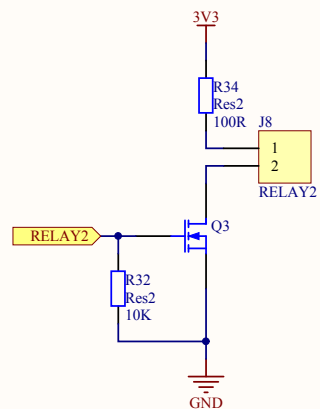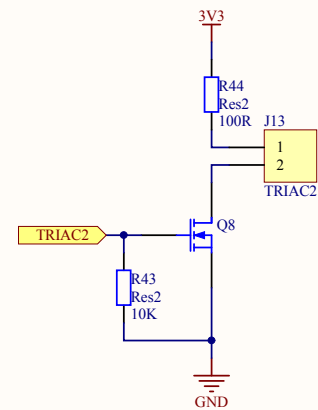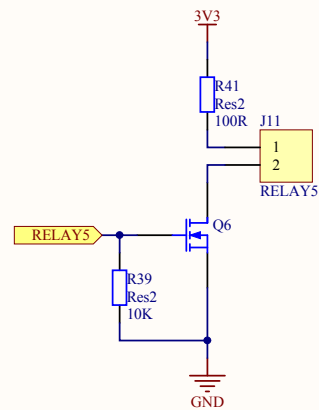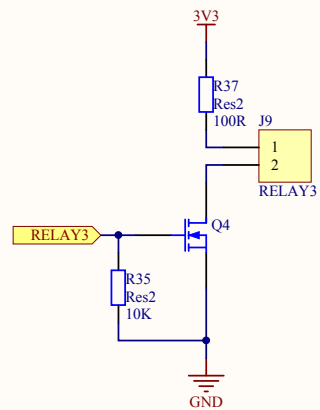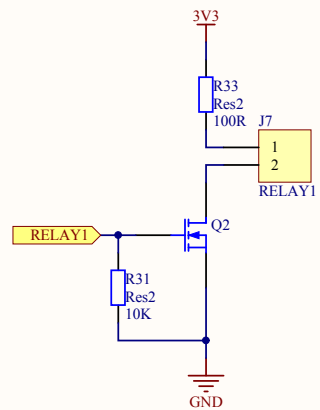


TITLE Electrical Interface			
DESCRIPTION Interface to optocouplers on the external system.			
SHEET 5 of 6	ENGINEER AJ	DATE 03/04/2011	
REVISION 005	AUTHOR AJ	FILE electrical_interface SchDoc	


Real Time Clock

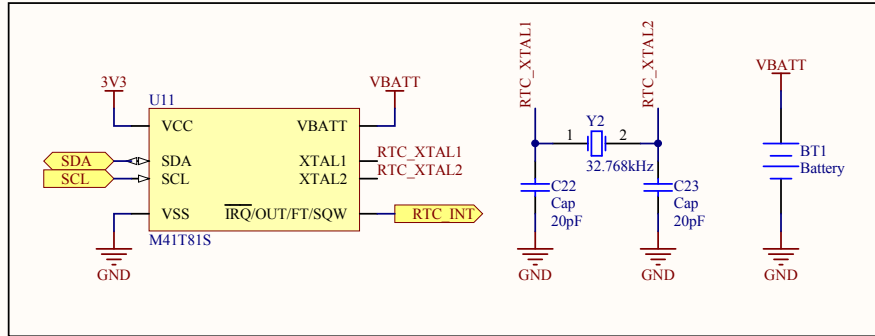


LCD

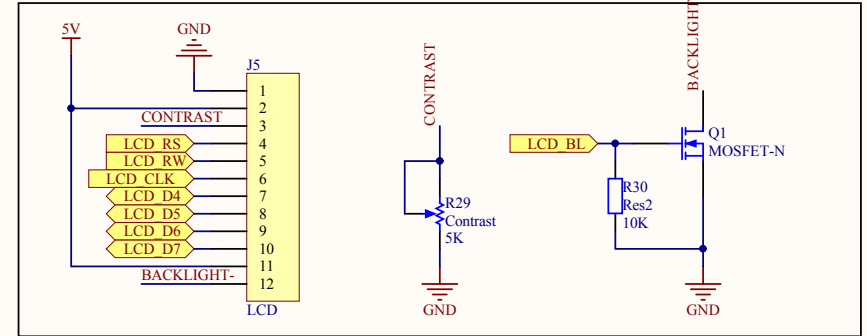



microSD Card

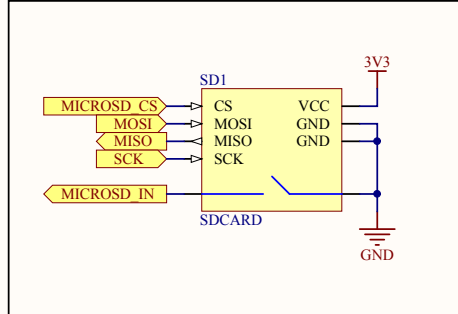

Keyboard

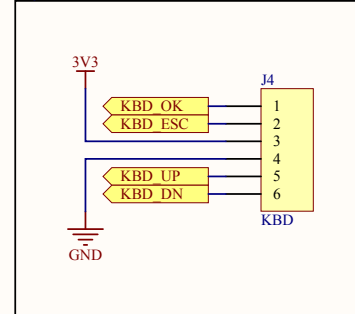


ICSP

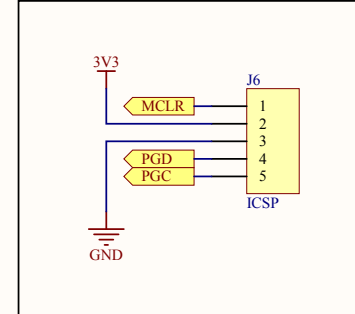

TITLE Miscellaneous Devices		
DESCRIPTION *		
SHEET 6 of 6	ENGINEER AJ	DATE 03/04/2011
REVISION 003	AUTHOR AJ	FILE misc.SchDoc



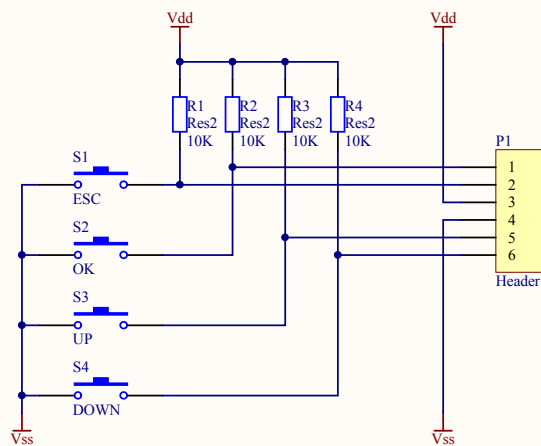

TITLE Keypad			
DESCRIPTION Keypad for the user interface			
SHEET 1 of 1	ENGINEER AJ	DATE 06/04/2011	
REVISION 003	AUTHOR AJ	FILE keyboard SchDoc	